



EZTR50 & EZTR75 Series Residential Condensing Tankless Bundle Set Specification Sheet

Bundle Package - Simplify installation with water heater EZ98DV (GQ-C2860WX-FF US) (EZTR50) or EZ111DV (GQ-C3260WX-FF-US) (EZTR75) and all accessories for installation in one box

- **Water Connection** - Top mount connections for easy water connections
- **Standard Input** - Gas consumption ranges from 18,000 BTUh to 180,000 BTUh (EZ98DV (GQ-C2860WX-FF US)) and 199,900 BTUh (EZ111DV (GQ-C3260WX-FF US))
- **Capacity Range** - Flow rates from 0.5 GPM up to 9.8 GPM (EZ98DV (GQ-C2860WX-FF US)) and 11.1 GPM (EZ111DV (GQ-C3260WX-FF US))
- **Compact Design** - ANSI Z21.10.3 / CSA 4.3 certified design for wall-mounted indoor installation
- **Durable Steel Casing with Polyester Coating**
- **Heat Exchanger** - High quality stainless steel design for primary and secondary heat exchanger
- **Compatible with 1/2" gas pipe** - Refer to installation manual
- **Venting Options** - Uses indoor 2" flexible polypropylene (included)
- **Direct Electronic Ignition**
- **Quick-Connect** Two identical units can be linked together by using the optional Quick Connect Cord (#QC-2) for twice the hot water capacity
- **Uniform Energy Factor** - 0.96 (NG) 0.96 (LP)
- **Temperature Controls** - includes remote thermostat that can precisely adjust the output temperature from 100°F to 140°F with the capability to display temperatures in both °C and °F
- **Power Cord Installation Kit** - 6' power cord is included
- **Safety Devices** - Flame Sensor, Overheat Prevention Device, Lightning Protection Device, Freeze Protection, and High Limit Switch
- **Additional Features** - Temperature Lockout, High Elevation Adjustment, Condensate Overflow Monitoring System, Service Reminder Function, and Wifi Ready
- **25-Year* Limited Heat Exchanger Warranty for Residential Use**
- **5-year Limited Parts Warranty & 1-Year Reasonable Labor**
- **Approvals***** - CSA, UPC**, NSF, Low NOx Approved by SCAQMD [$<14\text{ng/J}$ or 20ppm]



Included in Package

- ☐ EZ98DV (GQ-C3260WX-FF US) [EZTR50]
EZ111DV (GQ-C3260WX-FF US) [EZTR75]



- ☐ Flex Vent 2" Conversion Kit (EZ2-CK)
- ☐ Isolator Valve Set (IK-WV-200)
- ☐ Flex Vent 2" Kit 25 Feet (EZ2FVK-1)

Optional accessory

- ☐ Flex Vent 2" Kit 35 Feet (EZ2FVK-2)
- ☐ Wireless Monitor (NWC-ADAPTER)




* Refer to the Noritz Limited Warranty for complete coverage details at www.noritz.com

** This product complies with California AB1953 Low Lead Law and section 1417(d) of the Safe Drinking Water Act

***The approvals listed are for water heater. For inquiries on approvals for any included accessory, contact Noritz America.

Dimensions


< inch (mm) >

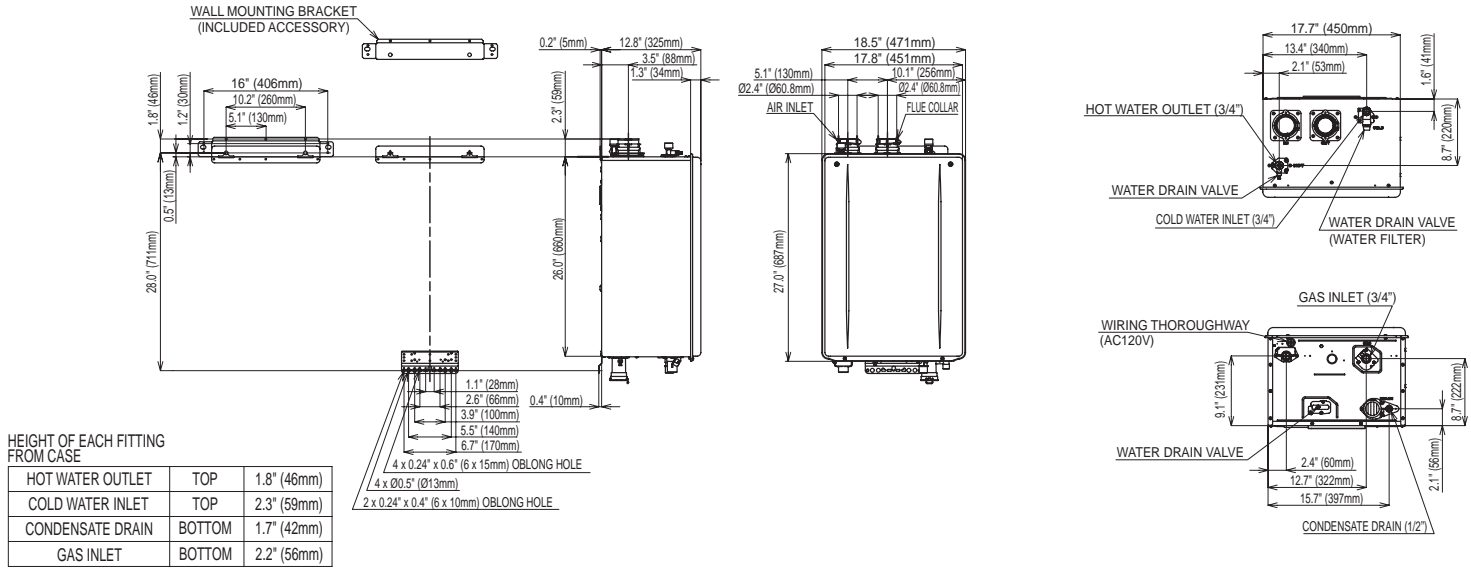

Flow Rates (GPM)

Temperature Rise (°F)	30	40	45	50	60	70	80	90	100	110	120	130	140
EZ98DV (GQ-C2860WX-FF US)	11.1	9.8	8.7	7.8	6.5	5.6	4.9	4.4	3.9	3.6	3.3	3.0	2.8
EZ111DV (GQ-C3260WX-FF US)	9.8	8.6	7.6	6.9	5.7	4.9	4.4	3.8	3.4	3.1	2.9	2.6	2.4

Pressure Loss

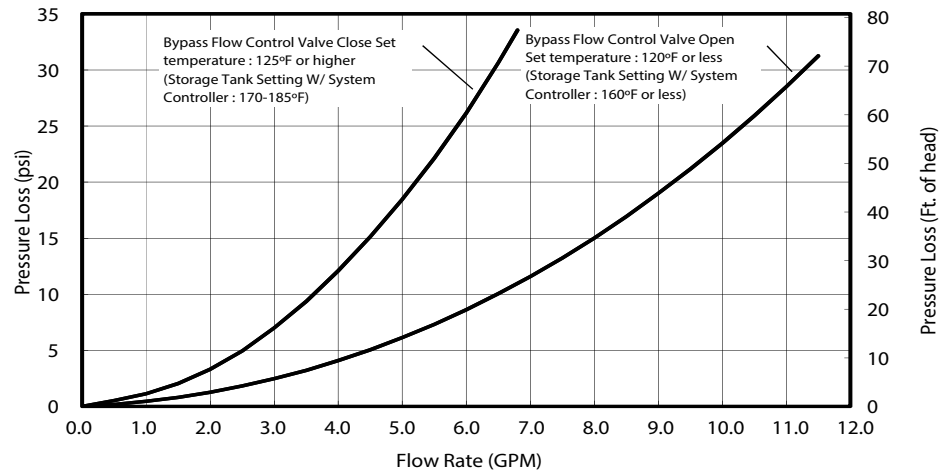

Water Heater Specifications

Model Name		EZ98 DV (GQ-C2860WX-FF US) / EZ111DV (GQ-C3260WX-FF US)
Weight		81 pounds
Operating Pressure		15 - 150 psi
Gas Supply Pressure		NG: 4.0" - 10.5" LP: 8.0" - 14.0"
Water Holding Capacity		0.65 Gallon (2.5L)
Connection Sizes	Water Inlet	3/4"
	Hot Water Outlet	3/4"
	Gas Inlet	3/4"
	Condensate Drain	1/2" Threaded
Power	Supply	120VAC (60Hz), less than 4 amperes
	Consumption	NG: 90W LP: 98W Freeze Prevention 178W
Freeze Protection		Outdoor: -4°F Indoor: -30°F
Temperature Settings	°F Mode	100-140°F (In 5°F intervals) (9 Options)
	°C Mode	37-48°C (In 1°C intervals), 50-60°C (In 5°C intervals) (15 Options)
Default Temperature Options	°F Mode	120, 135, 140°F (Default is 120°F)
	°C Mode	50, 55, 60°C (Default is 50°C)